Aerofloor LTD
SPECIALIST SUPPLIER OF AIRCRAFT INTERIOR SOFT FURNISHINGS

EASA VERTICAL BURN TESTS

60 AND 12 SECOND VERTICAL COMBINATION BURN TEST SAMPLE REQUIREMENTS

UNSTITCHED 3" EDGE

WHITE LINES SIGNIFY THE STITCHED EDGES

CROSS SECTION VIEW OF UNSTITCHED EDGE

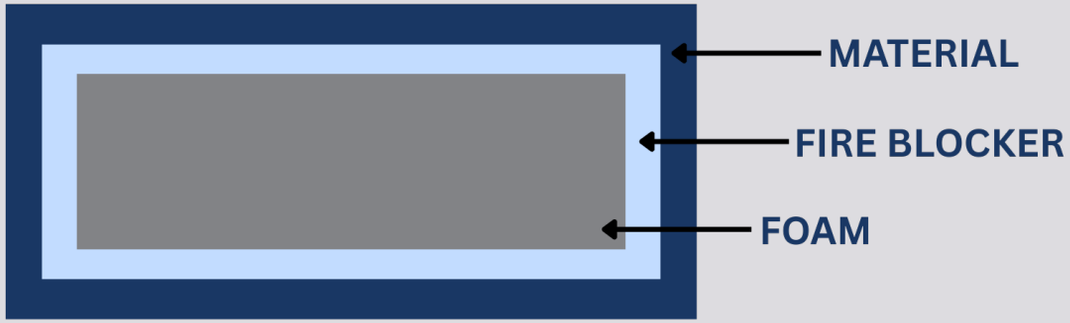

THIS MUST INCLUDE ANY KIND OF THREAD USED FOR STITCHING OR ADHESIVE

SAMPLES MUST MEASURE 12" BY 3" WIDE EACH

4 SAMPLES FROM THE WARP AND 4 SAMPLES FROM THE WEFT ARE REQUIRED TO CONDUCT THE DIRECTIONAL COMBINATION VERTICAL BURN TEST.

A MINIMUM OF 3 IS REQUIRED FOR A NON-DIRECTIONAL COMBINATION TEST HOWEVER WE RECOMMEND SENDING 4 SAMPLES.

IF YOU HAVE ANY QUERIES PLEASE DO NOT HESITATE TO CONTACT US

Unit M | Global Park | Moorside | Colchester | Essex | CO1 2TJ
TEL: +44 (0) 1206 798707 EMAIL: enquiries@aerofloor.com WEB: www.aerofloor.com

Iss. 03 | 25.06.25